


LED Display

Pixel pitch	8mm
Led type	SMD3535
Usage	Outdoor
Protection class	IP65
Brightness	6500nits
Led panel material	Die casting aluminum
Led panel size	1280 x 960mm
Weight	30 kgs
Power supply	110/220v-50/60Hz

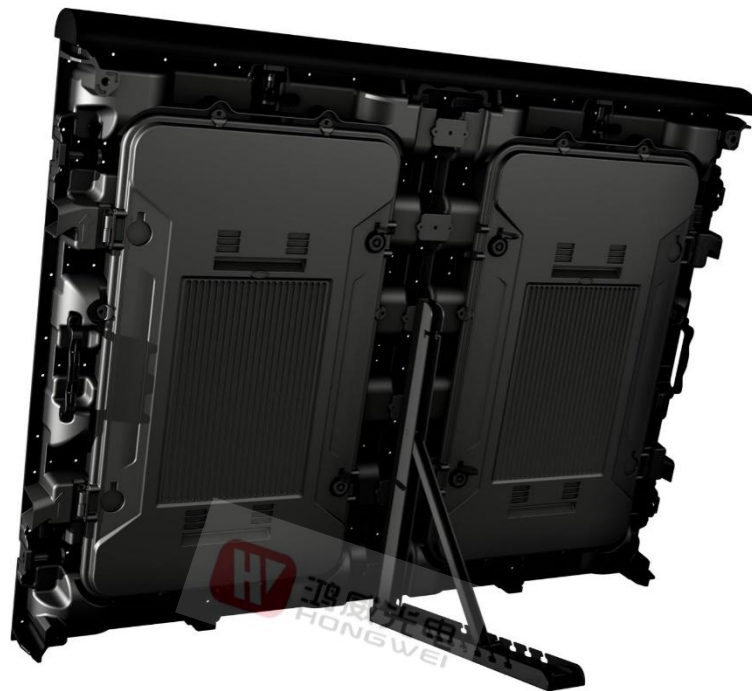

Technical Specification

Led lifetime	100000 hours
Viewing angle	140 ° / 140 ° . Extended angle that improves viewing of images from the side
Working temperature and humidity	-30° C / 55° C 10% ~ 95%
Refresh rate	3840Hz
Pixel density	15625 dot/m2
Control system	Novasater/Colorlight/Linsn
Video signal input	HDMI, DVI, VGA...
Grayscale	65536
Avg power consumption	400W / m2 - SmartPower system for less consumption
Brightness control	Programmable

- ADJUSTABLE BRACKET
 - FAST AND EASY INSTALLATION
 - SUPPORTED VIDEO AND IMAGE FILES: AVI, WMV, MPG, MOV, VOB, MP4, FLV, Bmp, jpg, png
- Floor 13A, Building A3, Uranus Technology Park, Kelian Road, Guangming District, Shenzhen